


# Protective Devices Miniature Circuit Breakers PLHT



Catalog

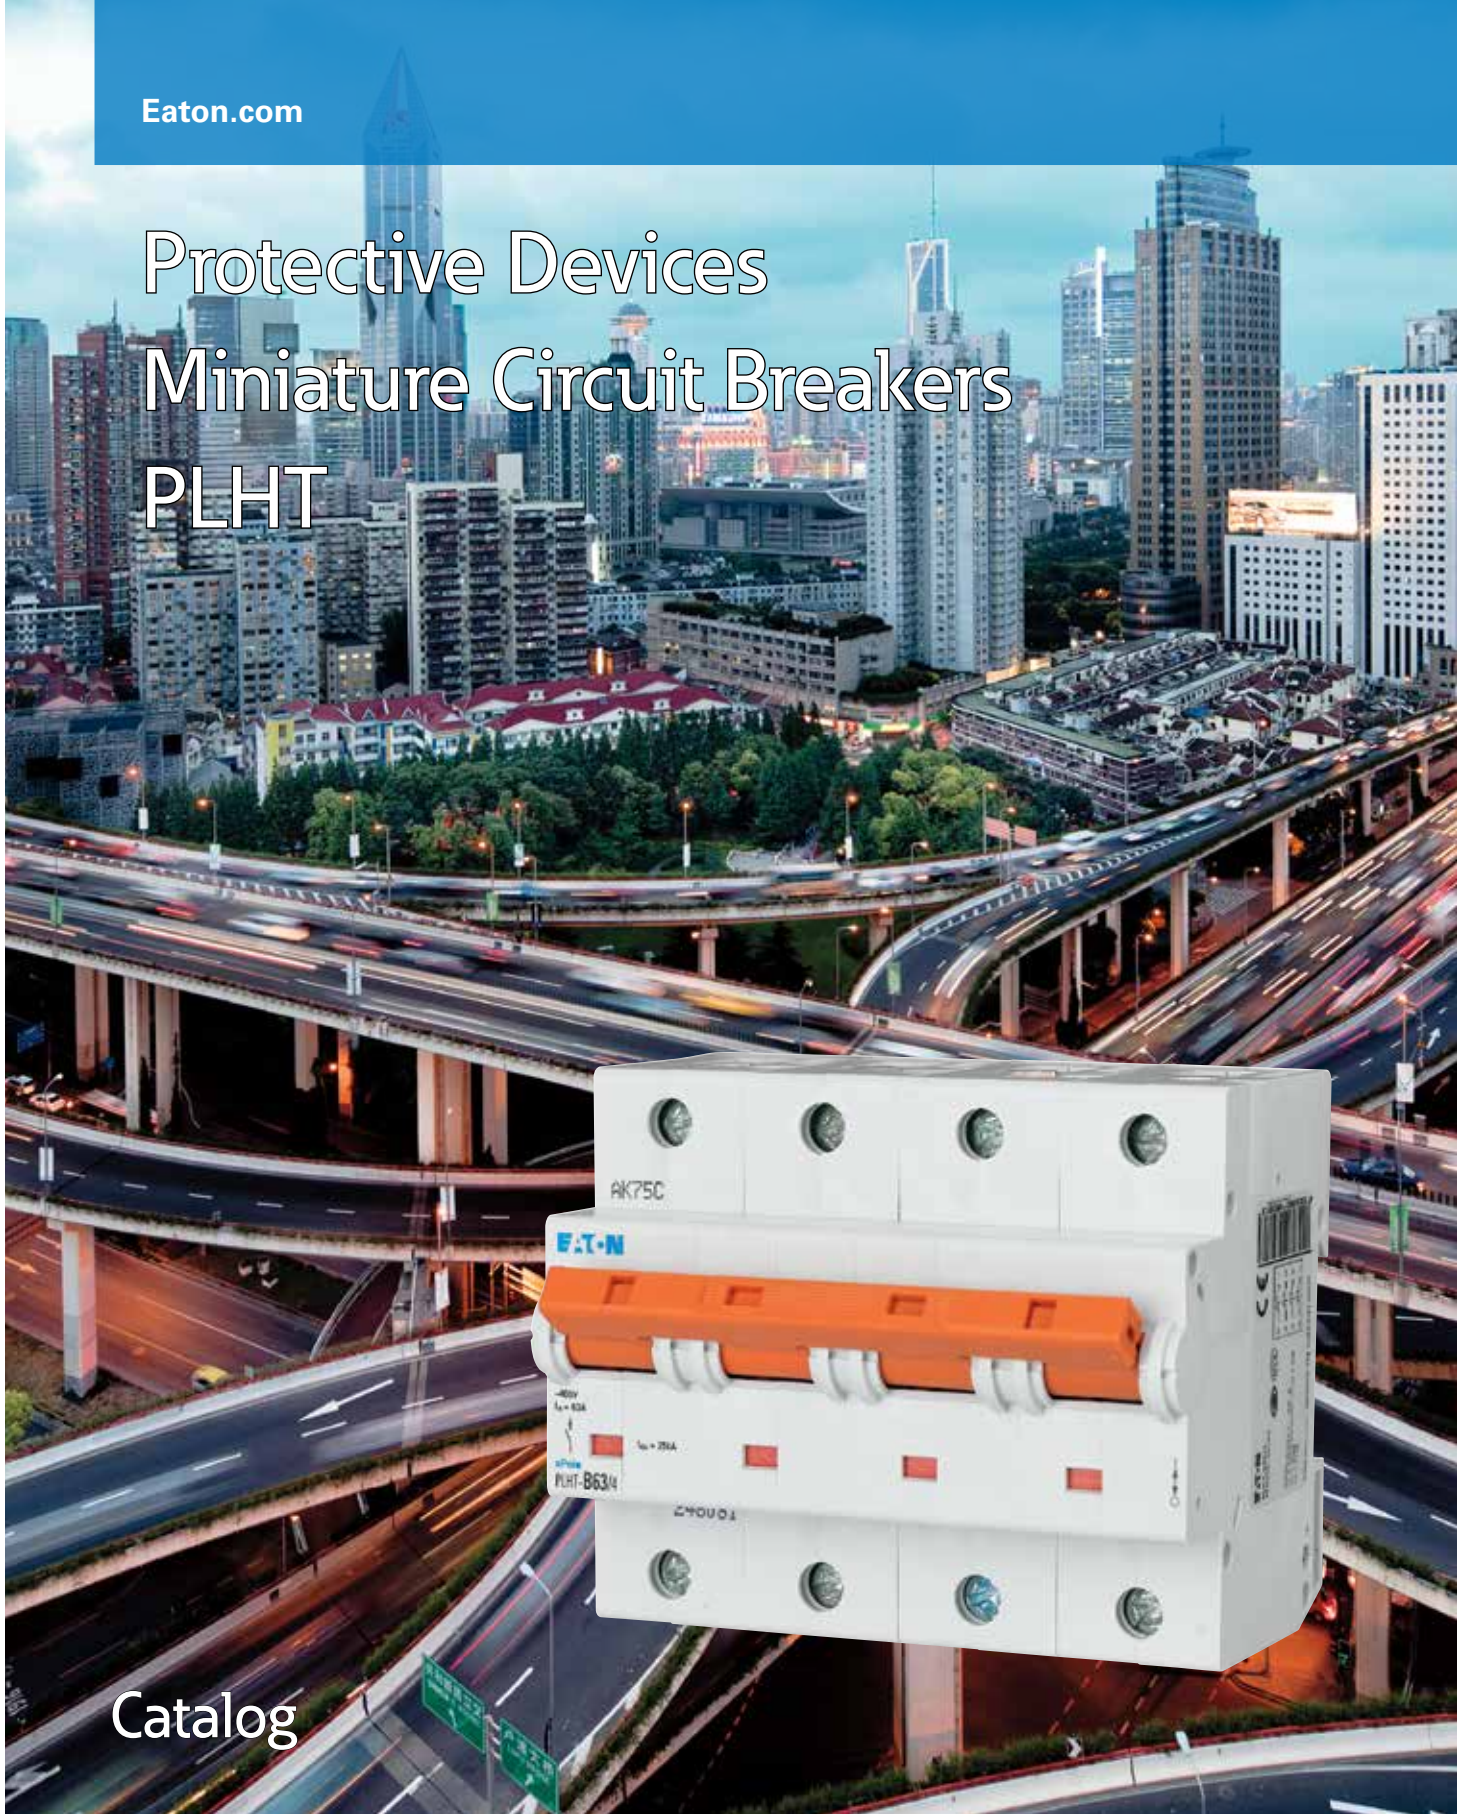

*Powering Business Worldwide*

SG43611



## Description

- High-quality miniature circuit breakers for commercial and industrial applications
- Contact position indicator red - green
- Accessories suitable for subsequent installation
- Rated currents up to 125 A
- Tripping characteristics B, C, D
- Rated breaking capacity up to 25 kA according to EN 60947-2

### Miniature Circuit Breakers PLHT

Rated current $I_n$ (A)	Type Designation	Article No.	Units per package
----------------------------	---------------------	-------------	----------------------

#### 25 kA, Characteristic B

SG41311



#### 1-pole

20	PLHT-B20	247972	12
25	PLHT-B25	247973	12
32	PLHT-B32	247974	12
40	PLHT-B40	247975	12
50	PLHT-B50	247976	12
63	PLHT-B63	247977	12
80	PLHT-B80	247978	12
100	PLHT-B100	247979	12
125	PLHT-B125	247980	12

SG42111



#### 2-pole

20	PLHT-B20/2	247998	6
25	PLHT-B25/2	247999	6
32	PLHT-B32/2	248000	6
40	PLHT-B40/2	248001	6
50	PLHT-B50/2	248002	6
63	PLHT-B63/2	248003	6
80	PLHT-B80/2	248004	6
100	PLHT-B100/2	248005	6
125	PLHT-B125/2	248006	6

SG42911



#### 3-pole

20	PLHT-B20/3	248024	4
25	PLHT-B25/3	248025	4
32	PLHT-B32/3	248026	4
40	PLHT-B40/3	248027	4
50	PLHT-B50/3	248028	4
63	PLHT-B63/3	248029	4
80	PLHT-B80/3	248030	4
100	PLHT-B100/3	248031	4
125	PLHT-B125/3	248032	4

SG45111



#### 3+N-pole

20	PLHT-B20/3N	248050	3
25	PLHT-B25/3N	248051	3
32	PLHT-B32/3N	248052	3
40	PLHT-B40/3N	248053	3
50	PLHT-B50/3N	248054	3
63	PLHT-B63/3N	248055	3
80	PLHT-B80/3N	248056	3
100	PLHT-B100/3N	248057	3
125	PLHT-B125/3N	248058	3

SG44811



#### 4-pole

20	PLHT-B20/4	248076	3
25	PLHT-B25/4	248077	3
32	PLHT-B32/4	248078	3
40	PLHT-B40/4	248079	3
50	PLHT-B50/4	248080	3
63	PLHT-B63/4	248081	3
80	PLHT-B80/4	248082	3
100	PLHT-B100/4	248083	3
125	PLHT-B125/4	248084	3

Rated current $I_n$ (A)	Type Designation	Article No.	Units per package
----------------------------	---------------------	-------------	----------------------

**25 kA, Characteristic C**

SG41311



**1-pole**

20	PLHT-C20	247981	12
25	PLHT-C25	247982	12
32	PLHT-C32	247983	12
40	PLHT-C40	247984	12
50	PLHT-C50	247985	12
63	PLHT-C63	247986	12
80	PLHT-C80	247987	12
100	PLHT-C100	247988	12
125	PLHT-C125	247989	12

SG42111



**2-pole**

20	PLHT-C20/2	248007	6
25	PLHT-C25/2	248008	6
32	PLHT-C32/2	248009	6
40	PLHT-C40/2	248010	6
50	PLHT-C50/2	248011	6
63	PLHT-C63/2	248012	6
80	PLHT-C80/2	248013	6
100	PLHT-C100/2	248014	6
125	PLHT-C125/2	248015	6

SG42911



**3-pole**

20	PLHT-C20/3	248033	4
25	PLHT-C25/3	248034	4
32	PLHT-C32/3	248035	4
40	PLHT-C40/3	248036	4
50	PLHT-C50/3	248037	4
63	PLHT-C63/3	248038	4
80	PLHT-C80/3	248039	4
100	PLHT-C100/3	248040	4
125	PLHT-C125/3	248041	4

SG45111



**3+N-pole**

20	PLHT-C20/3N	248059	3
25	PLHT-C25/3N	248060	3
32	PLHT-C32/3N	248061	3
40	PLHT-C40/3N	248062	3
50	PLHT-C50/3N	248063	3
63	PLHT-C63/3N	248064	3
80	PLHT-C80/3N	248065	3
100	PLHT-C100/3N	248066	3
125	PLHT-C125/3N	248067	3

SG44811



**4-pole**

20	PLHT-C20/4	248085	3
25	PLHT-C25/4	248086	3
32	PLHT-C32/4	248087	3
40	PLHT-C40/4	248088	3
50	PLHT-C50/4	248089	3
63	PLHT-C63/4	248090	3
80	PLHT-C80/4	248091	3
100	PLHT-C100/4	248092	3
125	PLHT-C125/4	248093	3

# 1.4

## Protective Devices

xPole

### Miniature Circuit Breakers PLHT

SG41311



Rated current  
 $I_n$  (A)

Type  
Designation

Article No.

Units per  
package

#### 25 kA, Characteristic D

##### 1-pole

Rated current $I_n$ (A)	Type Designation	Article No.	Units per package
20	PLHT-D20	247990	12
25	PLHT-D25	247991	12
32	PLHT-D32	247992	12
40	PLHT-D40	247993	12
50	PLHT-D50	247994	12
63	PLHT-D63	247995	12
80	PLHT-D80	247996	12
100	PLHT-D100	247997	12

SG42111



##### 2-pole

Rated current $I_n$ (A)	Type Designation	Article No.	Units per package
20	PLHT-D20/2	248016	6
25	PLHT-D25/2	248017	6
32	PLHT-D32/2	248018	6
40	PLHT-D40/2	248019	6
50	PLHT-D50/2	248020	6
63	PLHT-D63/2	248021	6
80	PLHT-D80/2	248022	6
100	PLHT-D100/2	248023	6

SG42911



##### 3-pole

Rated current $I_n$ (A)	Type Designation	Article No.	Units per package
20	PLHT-D20/3	248042	4
25	PLHT-D25/3	248043	4
32	PLHT-D32/3	248044	4
40	PLHT-D40/3	248045	4
50	PLHT-D50/3	248046	4
63	PLHT-D63/3	248047	4
80	PLHT-D80/3	248048	4
100	PLHT-D100/3	248049	4

SG45111



##### 3+N-pole

Rated current $I_n$ (A)	Type Designation	Article No.	Units per package
20	PLHT-D20/3N	248068	3
25	PLHT-D25/3N	248069	3
32	PLHT-D32/3N	248070	3
40	PLHT-D40/3N	248071	3
50	PLHT-D50/3N	248072	3
63	PLHT-D63/3N	248073	3
80	PLHT-D80/3N	248074	3
100	PLHT-D100/3N	248075	3

SG44811



##### 4-pole

Rated current $I_n$ (A)	Type Designation	Article No.	Units per package
20	PLHT-D20/4	248094	3
25	PLHT-D25/4	248095	3
32	PLHT-D32/4	248096	3
40	PLHT-D40/4	248097	3
50	PLHT-D50/4	248098	3
63	PLHT-D63/4	248099	3
80	PLHT-D80/4	248100	3
100	PLHT-D100/4	248101	3

Explanation PLHT:

P = xPole, LH = Miniature Circuit Breakers hochwertig, T = Rated breaking capacity 15, 20, 25 kA

Rated current $I_n$ (A)	Type Designation	Article No.	Units per package
----------------------------	---------------------	-------------	----------------------

**Miniature Circuit Breakers PLHT-V, 25 kA, similar to characteristic D**

SG69611



**1-pole**

20	PLHT-20-V	248102	12
25	PLHT-25-V	248103	12
32	PLHT-32-V	248104	12
40	PLHT-40-V	248105	12
50	PLHT-50-V	248106	12
63	PLHT-63-V	248107	12

**Accessories for Miniature Circuit Breakers PLHT, PLHT-V**

**Shunt trip release, Shunt trip release-Kit**

Operational voltage range V~	Type Designation	Article No.	Units per package
110-415 / Shunt trip release	Z-LHASA/230	248442	8
12-60 / Shunt trip release	Z-LHASA/24	248441	8
110-415 / Shunt trip release-Kit	Z-BHASA/230	248445	8
12-60 / Shunt trip release-Kit	Z-BHASA/24	248444	8

SG69311



**Auxiliary switch**

Function	Type Designation	Article No.	Units per package
1NO+1NC	Z-LHK	248440	10/100

SG16111




**Accessories for Miniature Circuit Breakers PLHT-V**

**Switching interlock, Busbar block, Neutral disconnecter**

Benennung	Type Designation	Article No.	Units per package
Switching interlock	LH-SPL	285752	1
Switching interlock	LHSP-E	215999	1
Switchoff interlock	LHSP-A	216000	1
Busbar block 35 mm <sup>2</sup>	Z-SV-35/PLHT-V	264939	4

wa\_sg11402



### Specifications | Miniature Circuit Breakers PLHT

#### Description

- Independent switching contacts
- With isolator function, meets the requirements of insulation co-ordination, distance between contacts  $\geq 4$  mm, for secure isolation

#### Accessories:


Auxiliary switch for subsequent installation (0.5 MU)	Z-LHK	248440
Shunt trip release subsequent installation (1.5 MU)	Z-LHASA/230	248442
	Z-LHASA/24	248441
Switching interlock	LH-SPL	285752

**Busbars:** see capter busbar systems


### Technical Data

		PLHT
<b>Electrical</b>		
Design according to		EN 60947-2
Current test marks as printed onto the device		
Rated voltage	$U_n$	AC: 230/400 V DC: 60 V (per pole, max. 2 poles)
Ultimate short-circuit breaking capacity according to IEC/EN 60947-2		
Characteristic B, C		$I_n = 20-63$ A: 25 kA $I_n = 80-100$ A: 20 kA $I_n = 125$ A: 15 kA
Characteristic D		$I_n = 20-63$ A: 25 kA $I_n = 80$ A: 20 kA $I_n = 100$ A: 15 kA
Characteristic		in accordance with B, C, D
Back-up fuse		max. 200 A gL
Rated insulation voltage		440 V
Peak withstand voltage	$U_{imp}$	4 kV
Selectivity class		in accordance with class 3
Endurance		$\geq 20,000$ switching operations
<b>Mechanical</b>		
Frame size		45 mm
Device height		90 mm
Device width		27 mm (1.5MU) per pole
Mounting		quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715
Degree of protection		IP20
Degree of protection, built-in		IP40
Upper and lower terminals		lift terminals
Terminal protection		finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity		2.5-50 mm <sup>2</sup>

### Connection diagrams

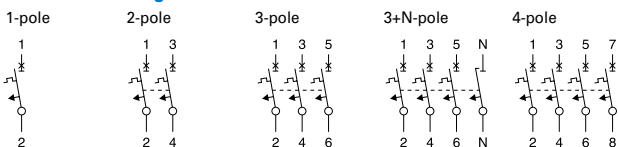


Dimensions (mm)

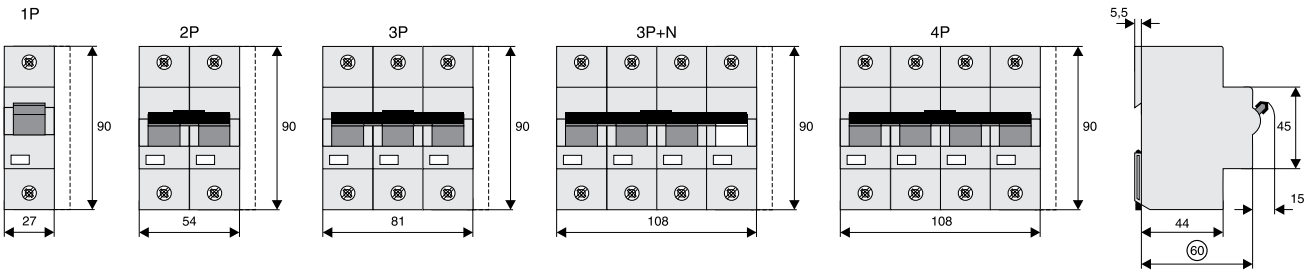


Load Capacity

Load capacity in case of block installation

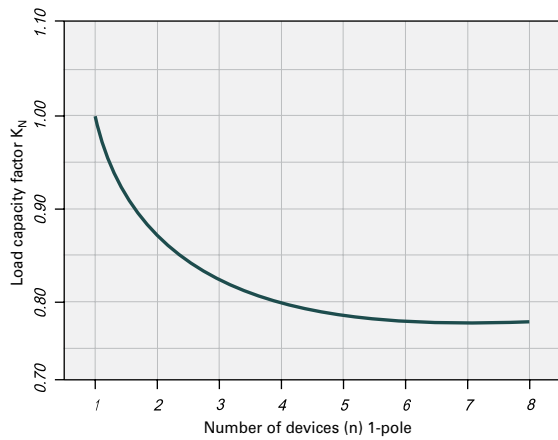


Effect of ambient temperature

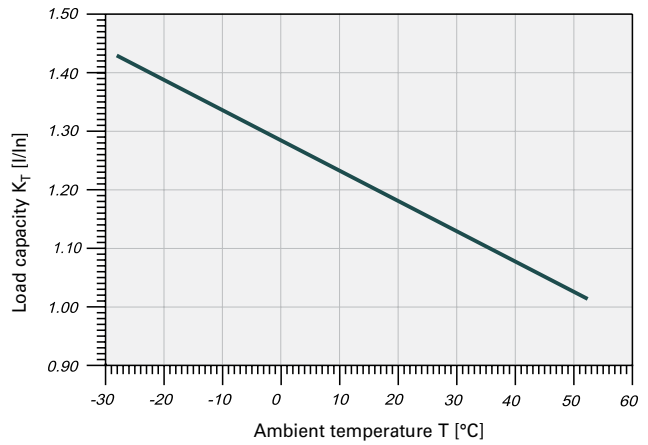


Permitted permanent load at ambient temperature  $T$  [°C] with n devices:  $I_{DL} = I_n K_T(T) K_N(N)$ .

Durchlassenergie

Maximum let-through energy PLHT, Characteristic C, 1-pole

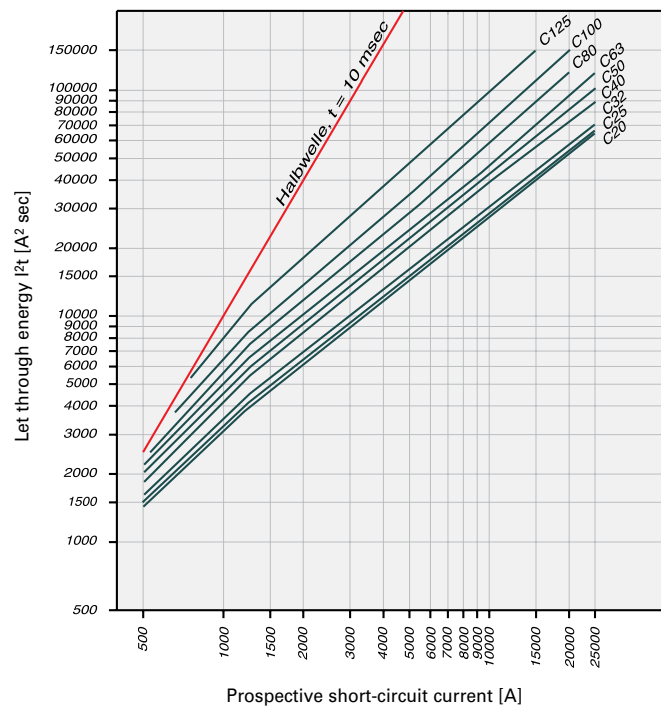

Maximum let-through energy PLHT, Characteristic D, 1-pole

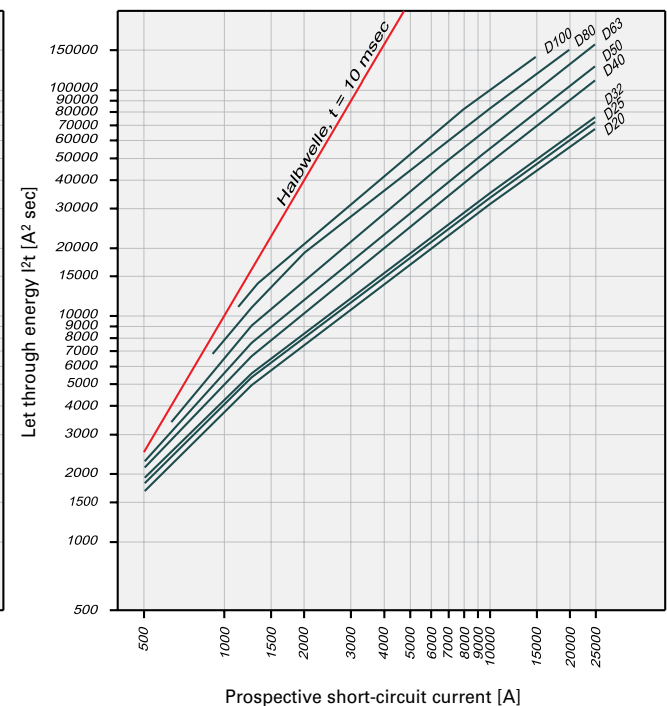

Determined according to 60898-1.



### Short-circuit Selectivity PLHT towards D01, D02, D03 and NH size 00

- Short-circuit selectivity (in kA) PLHT and upstream fuse D0 or NH, operating class gL/gG
- 1.4 . . . selectivity up to 1.4 kA; Darker areas: no selectivity

#### Selectivity towards back-up fuses D01, D02, D03

##### Characteristic C

PLHT $I_n$ [A]	Rated current of the back-up fuse in A gL/gG					
	25	35	50	63	80	100
20	0.5	1.0	2.0	2.9	3.9	7.6
25		1.0	1.9	2.8	3.8	7.3
32		1.0	1.8	2.7	3.6	7.0
40			1.6	2.2	3.0	5.6
50				2.1	2.8	5.2
63					2.7	4.8
80						4.3
100						
125						

##### Characteristic D

PLHT $I_n$ [A]	Rated current of the back-up fuse in A gL/gG					
	25	35	50	63	80	100
20	0.5	0.9	1.7	2.5	3.4	6.7
25		0.9	1.6	2.3	3.2	6.2
32		0.9	1.5	2.3	3.0	6.0
40			1.4	2.0	2.6	4.7
50				1.8	2.3	4.3
63					2.1	3.7
80						3.1
100						

#### Selectivity towards back-up fuses NH size 00

##### Characteristic C

PLHT $I_n$ [A]	Rated current of the back-up fuse in A gL/gG									
	25	35	40	50	63	80	100	125	160	200
20	0.5	1.0	1.3	1.9	2.7	3.7	6.7	17.0	25.0	25.0
25		0.9	1.3	1.8	2.6	3.5	6.5	17.0	25.0	25.0
32		0.9	1.2	1.7	2.4	3.3	6.0	15.0	23.0	25.0
40				1.4	2.1	2.9	4.8	12.0	18.0	25.0
50					1.9	2.7	4.5	11.0	17.0	25.0
63							4.2	10.0	15.0	25.0
80							3.8	8.5	12.0	25.0
100								7.0	10.0	25.0
125									7.5	25.0


##### Characteristic D

PLHT $I_n$ [A]	Rated current of the back-up fuse in A gL/gG											
	25	35	40	50	63	80	100	125	160	200	200	
20	<0.5	0.8	1.1	1.5	2.3	3.1	5.6	16.0	25.0	25.0	25.0	
25		0.7	1.0	1.4	2.1	3.0	5.3	14.0	23.0	25.0	25.0	
32		0.7	1.0	1.3	2.1	2.9	5.0	13.0	22.0	25.0	25.0	
40				1.1	1.8	2.5	4.2	10.0	15.0	25.0	25.0	
50					1.6	2.3	3.8	8.5	13.0	22.0	25.0	
63						2.1	3.2	7.0	10.5	18.0	25.0	
80							2.8	5.5	8.4	15.0	25.0	
100								4.8	7.5	12.5	25.0	

**Short-circuit Selectivity PLHT towards NZM**

In case of short-circuit, there is selectivity between the miniature circuit breakers PLHT and the upstream NZM up to the specified values of the selectivity limit current  $I_s$  [kA] (i. e. in case of short-circuit currents  $I_{ks}$  under  $I_s$  only the MCB will trip, in case of short-circuit currents above this value both protective devices will respond). Overload and short-circuit release unit NZM at max. value.

\*) basically in accordance with EN 60898-1 D.5.2.b



Short-circuit selectivity **Characteristic C** towards **NZM1\***)

PLHT	NZM...1-A gL/gG					
$I_n$ [A]	40	50	63	80	100	125
20	0.3	0.4	0.5	0.75	0.9	1.25
25	0.3	0.4	0.5	0.7	0.9	1.2
32		0.4	0.5	0.7	0.85	1.2
40			0.5	0.6	0.85	1.1
50				0.6	0.85	1.1
63					0.8	1
80						1
100						
125						

Short-circuit selectivity **Characteristic D** towards **NZM1\***)

PLHT	NZM...1-A gL/gG					
$I_n$ [A]	40	50	63	80	100	125
50						
63						
80						
100						

Short-circuit selectivity **Characteristic C** towards **NZM2\***)

PLHT	NZM...2-A gL/gG								
$I_n$ [A]	40	50	63	80	100	125	160	200	250
20	0.3	0.4	0.5	0.75	0.9	1.25	1.8	2.5	3.5
25	0.3	0.4	0.5	0.7	0.9	1.2	1.7	2.4	3.3
32		0.4	0.5	0.7	0.85	1.2	1.65	2.3	3.2
40			0.5	0.6	0.85	1.1	1.5	2.1	2.9
50				0.6	0.85	1.1	1.5	2	2.8
63					0.8	1	1.4	1.8	2.5
80						1	1.4	1.8	2.4
100							1.3	1.7	2.3
125								1.6	2.1

Short-circuit selectivity **Characteristic D** towards **NZM2\***)

PLHT	NZM...2-A gL/gG									
$I_n$ [A]	40	50	63	80	100	125	160	200	250	
50								1	1.4	2.6
63								1	1.3	2.3
80										2.1
100										

1) Selectivity limit current  $I_s$  under 0.5 kA

2) Selectivity limit current  $I_s$  = rated breaking capacity  $I_{cn}$  of the MCB

Darker areas: no selectivity

### Specifications | Miniature Circuit Breakers PLHT-V

#### Description

- Special type of miniature circuit breaker PLHT for trade and industry applications upstream of the meter
- Independent switching contacts
- High current limit
- With isolator function, meets the requirements of insulation co-ordination, distance between contacts  $\geq 4$  mm, for secure isolation
- Anti-Tamper device and Switchoff interlock available

#### Accessories:

Auxiliary switch for subsequent installation (0.5 MU)	Z-LHK	248440
Shunt trip release subsequent installation (1.5 MU)	Z-LHASA/230	248442
	Z-LHASA/24	248441
Neutral disconnecter	Z-NTS	248443

#### Busbars:

see capter busbar systems

### Technical Data


		PLHT-V
<b>Electrical</b>		
Design according to		EN 60947-2
Current test marks as printed onto the device		
Rated voltage	$U_n$	AC: 230/400 V DC: 60 V (per pole, max. 2 poles)
Ultimate short-circuit breaking capacity according to IEC/EN 60947-2		25 kA
Service short-circuit breaking capacity		20 kA
Rated breaking capacity		DC: max. 60 V, 1-pole
Characteristic		similar to D
Back-up fuse		max. 200 A gL (>20 kA)
Rated insulation voltage		440 V
Peak withstand voltage	$U_{imp}$	4 kV
Selectivity class		in accordance with class 3
Endurance		$\geq 20,000$ switching operations
<b>Mechanical</b>		
Frame size		45 mm
Device height		90 mm
Device width		27 mm (1.5MU) per pole, 30 mm per pole PLHT-V with interlock
Mounting		quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715
Degree of protection		IP20
Degree of protection, built-in		IP40
Upper and lower terminals		lift terminals
Terminal protection		finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity		2.5-50 mm <sup>2</sup>

#### Connection diagram

1-pole



#### Dimensions (mm)

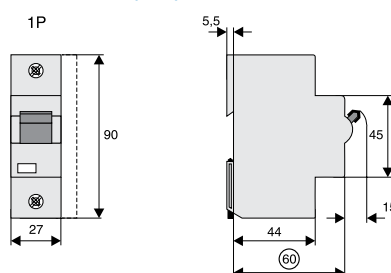

**Specifications | Accessories for PLHT, PLHT-V**


**Shunt trip release Z-LHASA**

- Can be mounted subsequently
- Contact position indicator red/green
- Marking labels can be fitted
- Wide operational voltage range
- Sufficient power of extra low voltage source must be ensured  
Z-LHASA/24: min. 90 VA

**Technical Data**

	Z-LHASA
<b>Electrical</b>	
Operational voltage range	
Z-LHASA/230	110-415 V~
Z-LHASA/24	12-60 V~
Operational frequency	50-60 Hz
Maximum current consumption during switch-on at $U_n$	
Z-LHASA/230	2 A
Z-LHASA/24	18 A
<b>Mechanical</b>	
Frame size	45 mm
Device height	90 mm
Device width	27 mm
Mounting	quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715
Degree of protection	IP20
Degree of protection, built-in	IP40
Upper and lower terminals	lift terminals

**Dimensions (mm)**




**Auxiliary switch Z-LHK**

- Auxiliary switch according to IEC 947-5-1
- Can be mounted subsequently

**Technical Data**

	Z-LHK
<b>Electrical</b>	
Rated operational current	(250 V~) 6 A / AC13
Minimum operational voltage	24 V each line
Rated thermal current	8 A
Rated insulation voltage	440 V~
Maximum back-up fuse	6 A gL
Contacts	1NO+1NC
Utilisation category AC13	6 A / 250 VAC 2 A / 440 VAC
Utilisation category DC13	4 A / 60 VDC 2 A / 110 VDC 0,5 A / 230 VDC
<b>Mechanical</b>	
Frame size	45 mm
Device height	90 mm
Device width	9 mm
Mounting	mounted onto protective devices
Degree of protection, built-in	IP40
Upper and lower terminals	lift terminals
Terminal capacity	1 x 1 mm <sup>2</sup> to 2 x 2.5 mm <sup>2</sup>

**Connection diagram****Dimensions (mm)**

**Specifications | Accessories for PLHT-V**

**Switching interlock LHSP-E, LH-SPL**

- Prevents undesired switching ON or OFF


**Switchoff interlock LHSP-A**

- Prevents undesired switch-OFF

**Busbar block 35 mm<sup>2</sup> Z-SV-35/PLHT-V, 3-pole (see capter busbar systems)**

- 110/220 A
- Step distance 30 mm

**Dimensions (mm)**

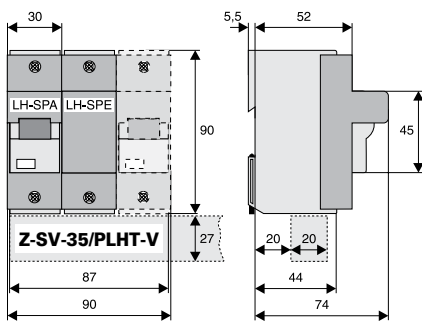

Eaton's electrical business is a global leader with deep regional application expertise in power distribution and circuit protection; power quality, backup power and energy storage; control and automation; life safety and security; structural solutions; and harsh and hazardous environment solutions. Through end-to-end services, channel and an integrated digital platform & insights Eaton is powering what matters across industries and around the world, helping customers solve their most critical electrical power management challenges.

For more information, visit [Eaton.com](https://www.eaton.com).



<http://id1.hu/eaton/xpole-plHT-kismegszakito>

**Eaton Industries (Austria) GmbH**  
Scheydgasse 42  
1210 Vienna  
Austria

**Eaton**  
EMEA Headquarters  
Route de la Longeraie 7  
1110 Morges, Switzerland

© 2020 Eaton  
All Rights Reserved  
Publication No. CA019075EN  
Article number 302801-MK  
July 2021

Changes to the products, to the information contained in this document, and to prices are reserved; as are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

